


Tama Paperboard

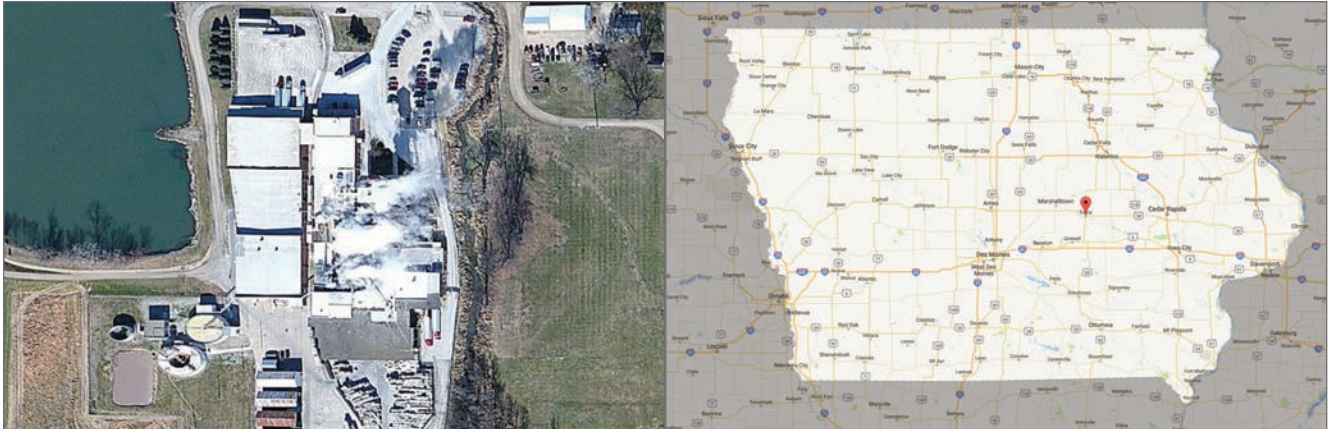

Location:

Tama, IA

Trim:

87"

Caliper Range:

.016" – .028"

Rolls:

- ✓ Widths – 3" or greater
- ✓ 60" – 72" diameters
- ✓ 12" cores
- ✓ Width tolerance: $\pm 1/32"$
- ✓ Length tolerance: $\pm 1/16"$

Certifications:

- ✓ ISO 9001 Certified
- ✓ FSC®, SFI® and PEFC® Chain of Custody Standard for Recycled Paper
- ✓ FDA® Compliant for Dry Food Packaging
 - 21 CFR 176.170
 - 21 CFR 176.18
 - 21 CFR 176.260
- ✓ RPTA 100% Certified

Product Offerings:

- ✓ Clay-Coated Recycled Boxboard
- ✓ Specialty Grades
 - Britone®
 - Freetone
 - Whitone®
- ✓ Sheeter
 - Max Width: 57"
 - Max Length: 65"
 - Min Width: 17"
 - Min Length: 20"

TAMA PAPERBOARD SPECIALIZES IN GREIF® BRANDED GRADES:

Britone®

Coated recycled paperboard with a smooth, double clay-coated surface, excellent stiffness, scoring characteristics and reliable filling line performance.

Whitone®

A 100% recycled SBS alternative utilizing a fiber white back with a brightness of 65. Whitone maintains the excellent stiffness, scoring characteristics and reliable filling line performance of all our Britone products.

Freetone

Britone paperboard with enhanced properties designed for stability and performance in refrigerator and freezer applications.

Tama Paperboard *page 2*

| Caliper (Inch) | Basis Weight (lb/1000 ft ²) | Moisture (%) | Brightness (%) | Taber Stiffness (g·cm) | | ZDT (lb/in ²) |
|----------------|---|--------------|----------------|------------------------|--------|---------------------------|
| | | | Top | MD | CD | |
| Target | Target | Target | Target | Target | Target | Target |
| .016 | 69 | 6.0 | 80 | 200 | 70 | 50 |
| .018 | 77 | 6.0 | 80 | 270 | 92 | 50 |
| .020 | 82 | 6.0 | 80 | 345 | 120 | 50 |
| .022 | 88 | 6.0 | 80 | 440 | 150 | 50 |
| .024 | 96 | 6.0 | 80 | 530 | 185 | 50 |
| .026 | 104 | 6.0 | 80 | 665 | 235 | 50 |
| .028 | 112 | 6.0 | 80 | 760 | 255 | 50 |

For more information: 1-641-484-2884